

12038


HOUSING	Aluminium die casting
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball bearing
TERMINATION	Lead wire UL 1430 AWG#22
OPERATION VOLTAGE	200 to 240 VAC
DIELECTRIC STRENGTH	1500 VAC/Sec 5 mA max.
INSULATION	Class A
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
OPERATING TEMPERATURE	-30 to +75 °C
SAFETY	Impedance protected
WEIGHT	530 g
ROHS COMPLIANCE	Yes
ADDITIONAL FUNCTION	Tropi




SIZE

120 x 120 x 38 mm

DIMENSION

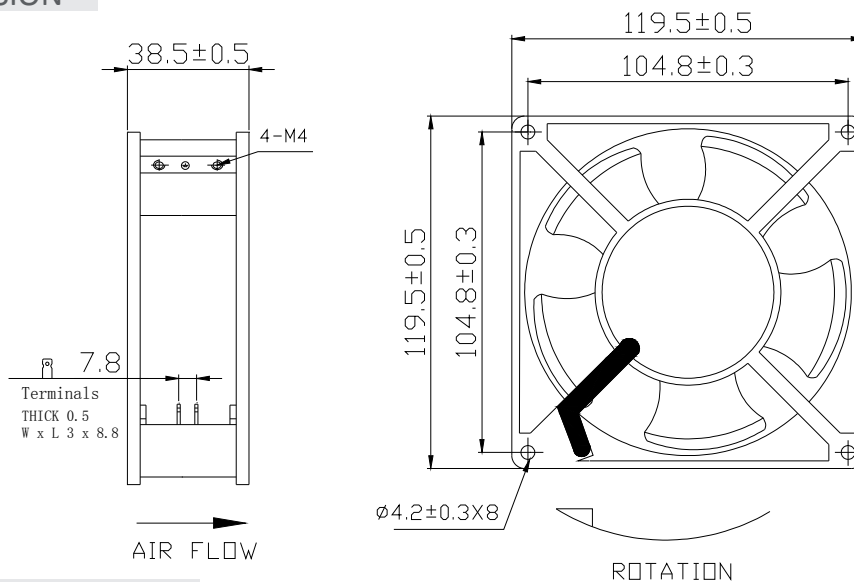

AIR PERFORMANCE

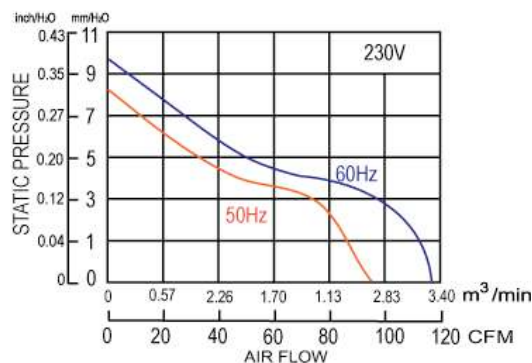

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
ART1557-12038-LC	VAC	Hz	A	Watt	R.P.M.	mmH ₂ O	CFM	dB-A
	220	50/60	0.14/0.15	22/21	2700/3100	8.38/9.65	95/115	42/47