12038 IP54

HOUSING	Aliminium die casting, painted black
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	Shaded pole motor
TERMINATION	Lead wire
OPERATION VOLTAGE	105 to 245 VAC
DIELECTRIC STRENGHT	1500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
OPERATING TEMPERATURE	-40 to +50 °C
SAFETY	Impedance protected
WEIGHT	550 g
ROHS COMPLIANCE	Yes
ADDITIONAL FUNCTION	Tropi

SIZE

120 x 120 x 38 mm

DIMENSION

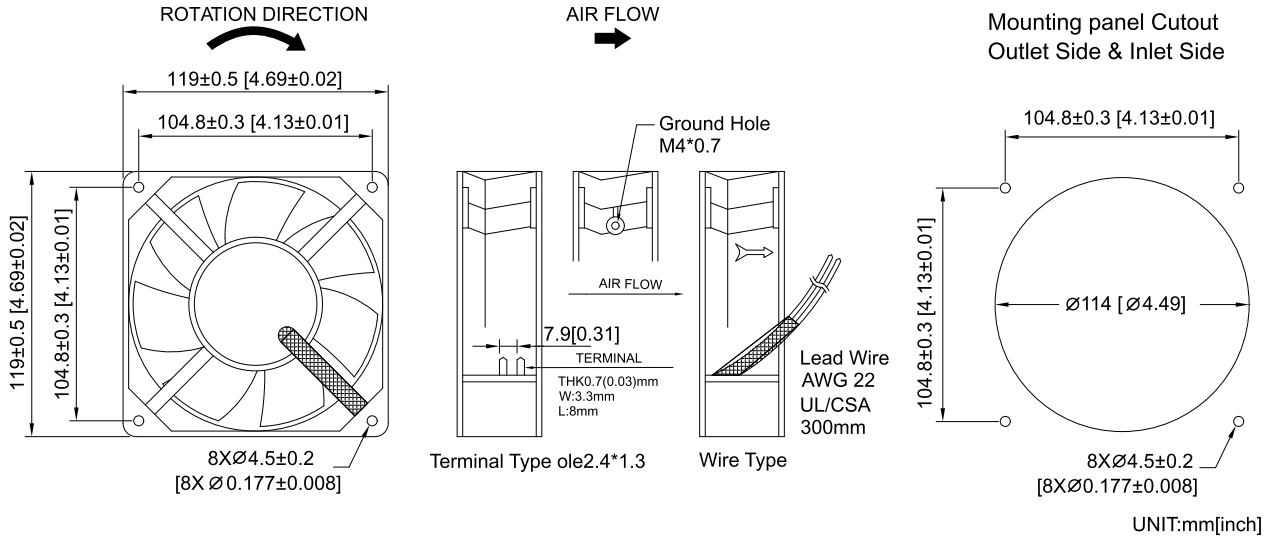

AIR PERFORMANCE

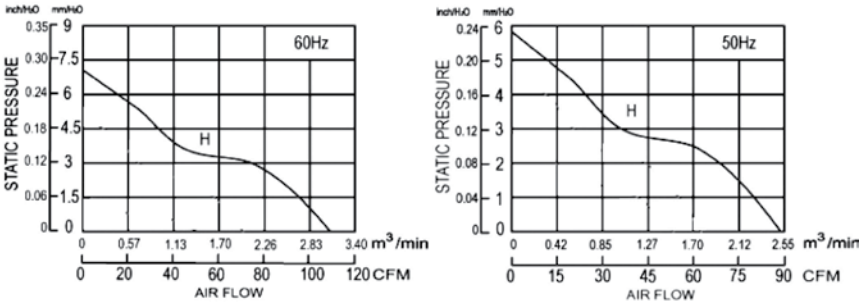

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VAC	Hz	A	Watt	R.P.M.	mmH_2O	CFM	dB-A
ART1770 12038-230-IP54	230	50/60	0.13/0.12	21.4/18.7	2650/3000	5.7/7.0	88/107	42